

(43)Date of publication of application : 22.12.1992


G10L 3/00

(71)Applicant : MATSUSHITA ELECTRIC IND CO
LTD

(72)Inventor : FUTAYADA KATSUYUKI
HOSHIMI MASAKATSU
HIRAOKA SEIJI
KIMURA TATSUYA

(57)Abstract:

CONSTITUTION: A partial distance calculation part 4 finds partial distances between an input vector formed of plural frames on a multiframe buffer 3 and partial standard patterns of a voice to be recognized on a statistical distance scale based upon posterior probability and while input frames are shifted, the partial distances are accumulated over the whole voice to employ the name of the voice having the minimum accumulated distance as a recognition result. The partial standard patterns are generated in partial section units by arranging the time length of the voices that many speakers speak and dividing it into the partial sections. Further, also the ambient noise is regarded as an input signal, only the signal can be spotted and recognized.

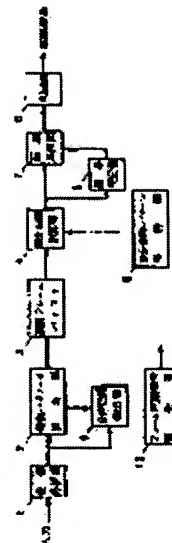

LEGAL STATUS

[Date of request for examination]

[Date of sending the examiner's decision of rejection]

[Kind of final disposal of application other than the examiner's decision of rejection or application converted registration]

[Date of final disposal for application]

[Patent number]

[Date of registration]

[Number of appeal against examiner's decision of rejection]

[Date of requesting appeal against examiner's decision of rejection]

[Date of extinction of right]

Copyright (C); 1998,2003 Japan Patent Office